


# AQUABLAST

Wetblast attachment

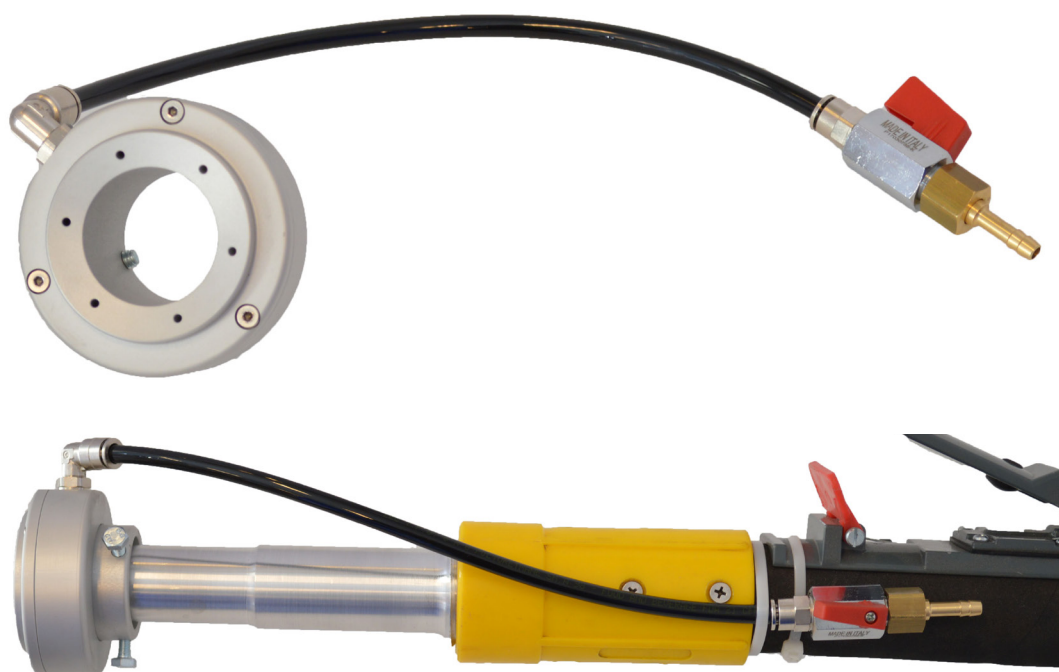

## Description

The Airblast Wetblast Attachment is a practical add-on to dry blasting and eliminates about 80% of the dust without lowering blast efficiency. Used by building and painting contractors, shipyards and refineries, the Wetblast Attachment eliminates about 80% of the dust without lowering blast efficiency. It is suitable for jobs where excessive dust is generated. When used to blast steel surfaces, a rust inhibitor is recommended. The inhibitor can be sprayed on the surface immediately after blasting or can be mixed in a water tank equipped with a pump and sprayed through the wetblast head during blasting.

The Wetblast Attachment head is equipped with locking screws for mounting on a nozzle, is mixing the water into the blast pattern just after air and abrasive leave the nozzle.

The uniform spray of the Airblast Wetblast Attachment is achieved by six water jets which surround the nozzle and direct the water flow to a point in front of the nozzle. As the water hits the air/abrasive stream it atomizes to close in the abrasive particles. The water volume can be adjusted using the ball valve. The Aquablast Wetblast Attachment is used in combination with standard tap water or water pumps.

## AQUABLAST WETBLAST ATTACHMENT

Part no.	Description
5031000	AQUABLAST - WETBLAST ATTACHMENT, COMPLETE Includes water jacket, shut-off valve, flexible hose and petcock

## SPARE PARTS AQUABLAST WETBLAST ATTACHMENT

Item	Part no.	Description	Qty required
1	5031100	Aquablast Wetblast Attachment, bare	1
2	5031601	Elbow coupling 1/4" x 8 mm	2
3	5031700	Water hose 6 x 1 mm L-300 mm	1
4	5031600	Coupling 1/4" x 8 mm	1
5	1152000	Ball valve 1/4"	1
6	2178900	Hose barb incl. nut	1
7	5031800	Bolt	3

